


Universal LCD/LED Flat TV Wall Mount

Installation Guide

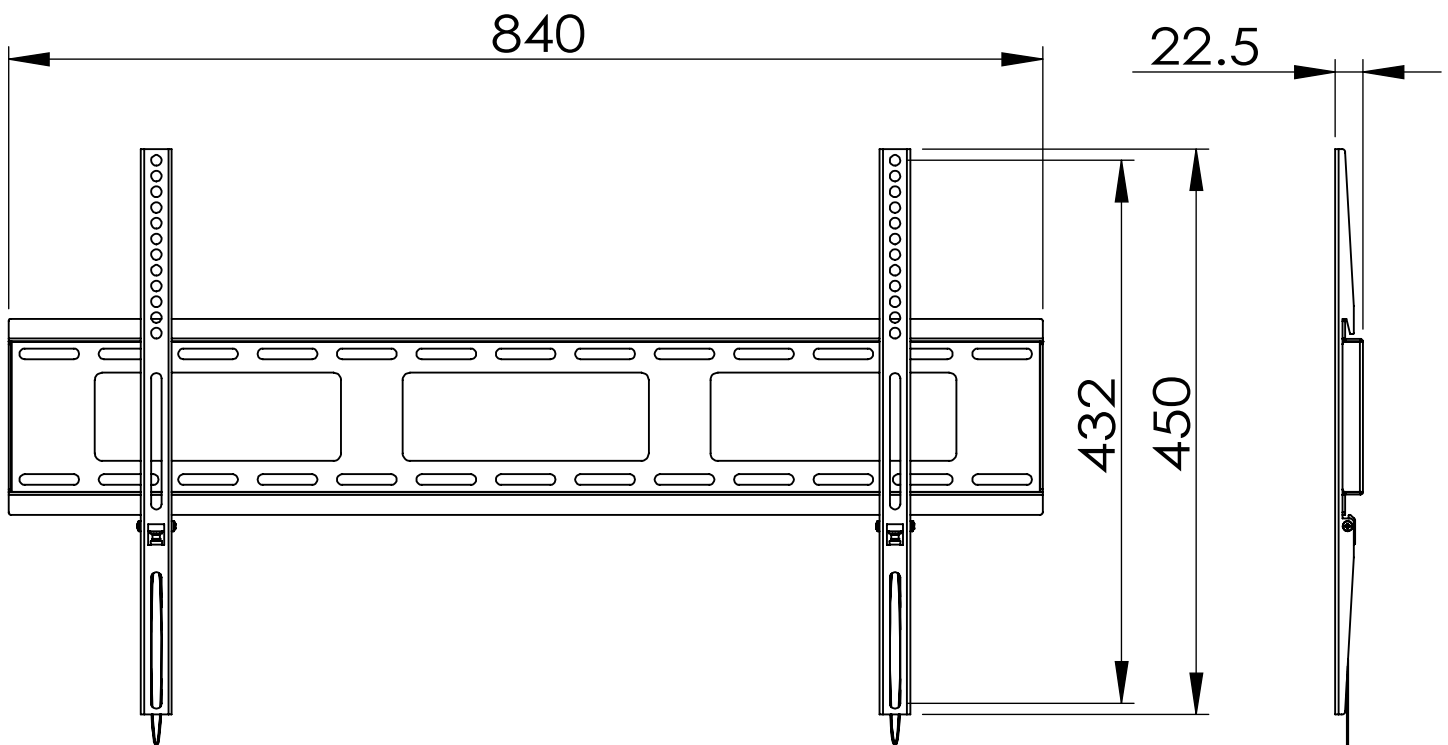

Heavy Duty Steel and Supports 37"-90" TV


VESA 100x100-800x400

Load Capacity: 150lbs(68kg)


Spring Lock for Quick and Simple Installation

All Hardware Included


Supplied Parts and Hardware List

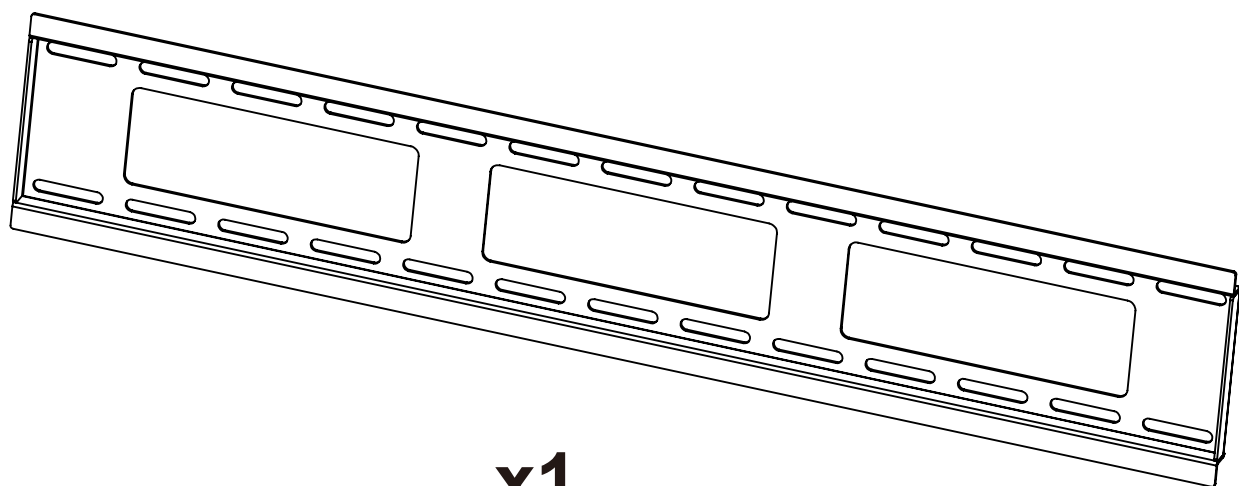

x1

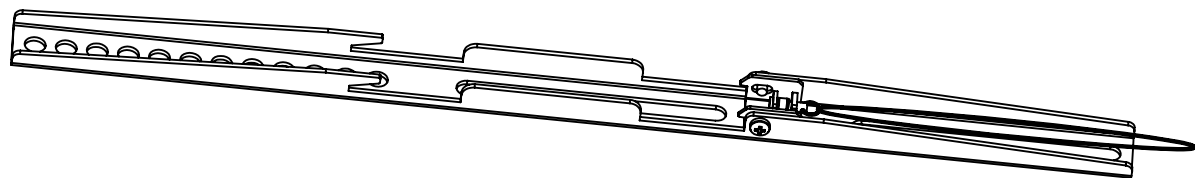


x2




x4

A: M6 x 15mm
Bolt




x4

B: M6 x 25mm
Bolt



x4

C: M8 x 20mm
Bolt



x4

D: M8 x 35mm
Bolt



x4

E: Washer




x4

F: Lag Bolt Washer




x4

G: 10mm



x4

H: Lag Bolt




x4

I: Concrete Anchor

Step 1: Mount Wall Plate


Wood Stud Wall

The Wall Plate must be mounted to two wood studs. Use a stud sensor to locate the two studs. Then use 5mm drill and pre-drill four holes.

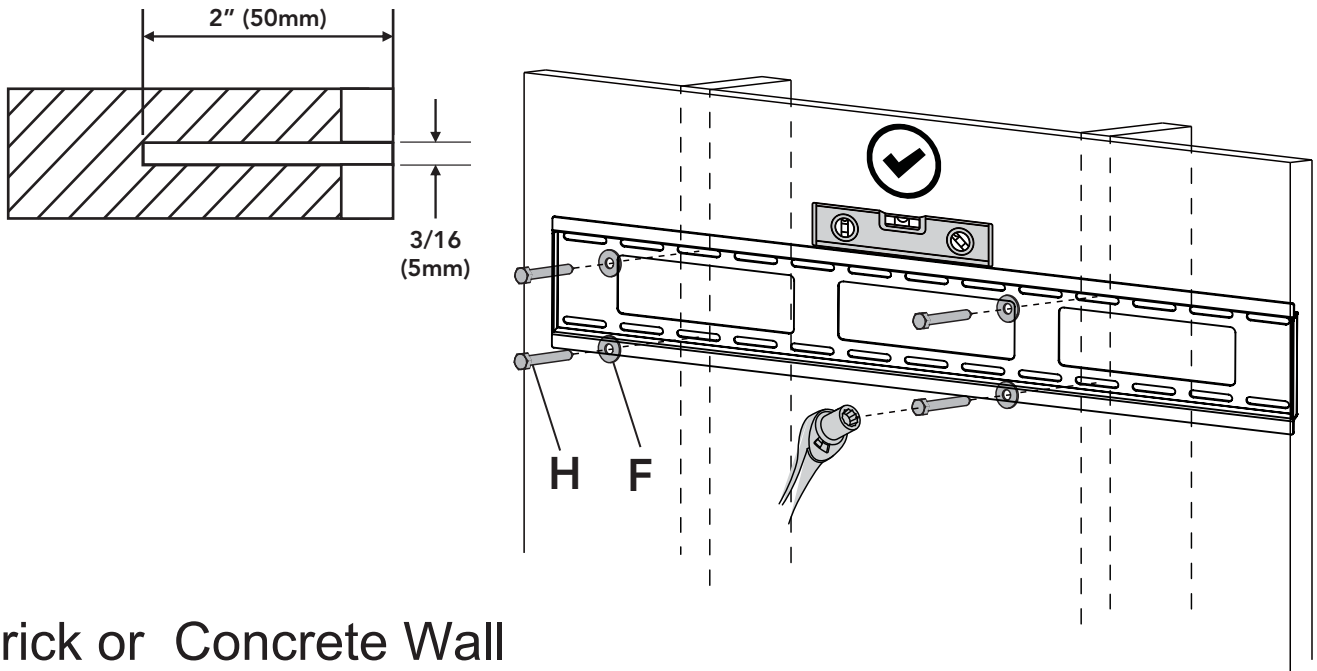


Brick or Concrete Wall

Using the Wall Plate as a template, mark four holes at your desired height. Use 11mm drill and Pre-drill four holes, insert the Concrete Anchor(I).

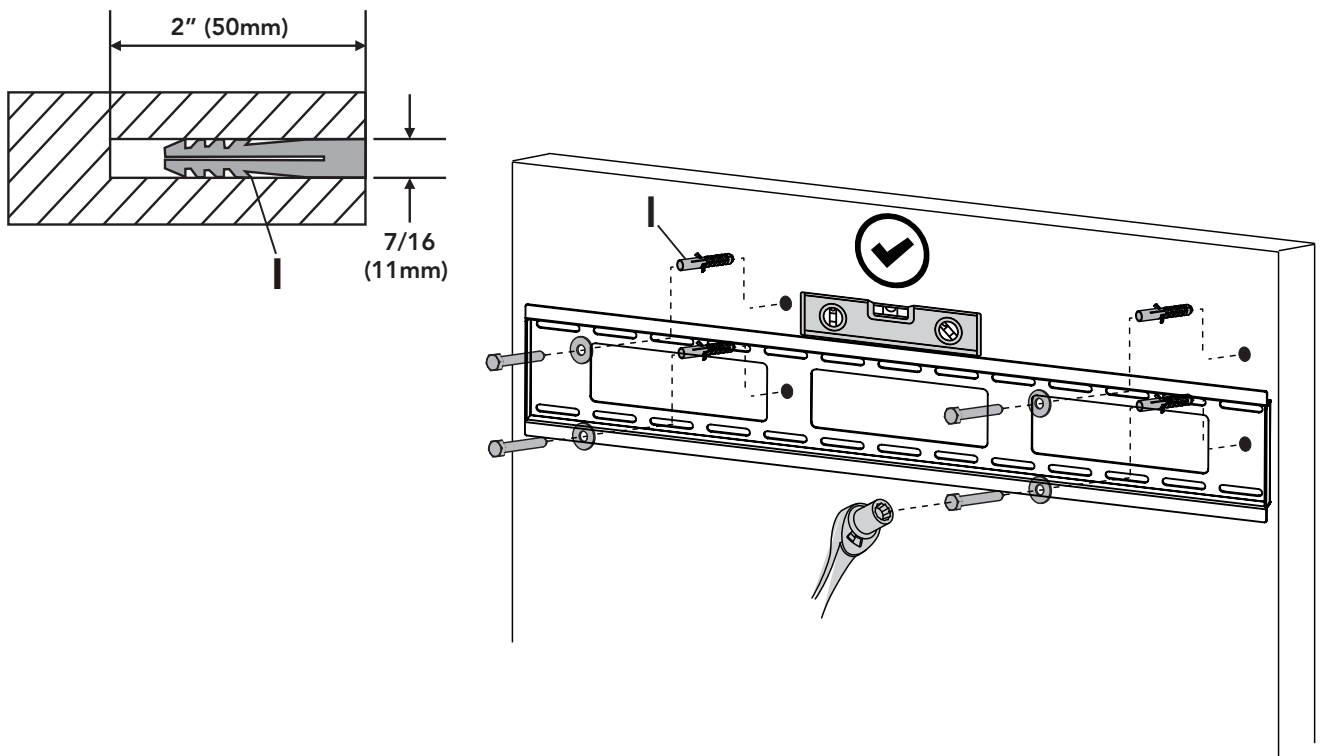

Step 2: Attach TV Bracket

Select the correct diameter bolt and hand thread into the back of the TV to determine the correct length. Use washer(E)for bolt A and B, C and D(M8) not need washers. If your TV has a curved back or deep recesses, you can use the spacers (G). Attach TV bracket arms to the back of the TV.

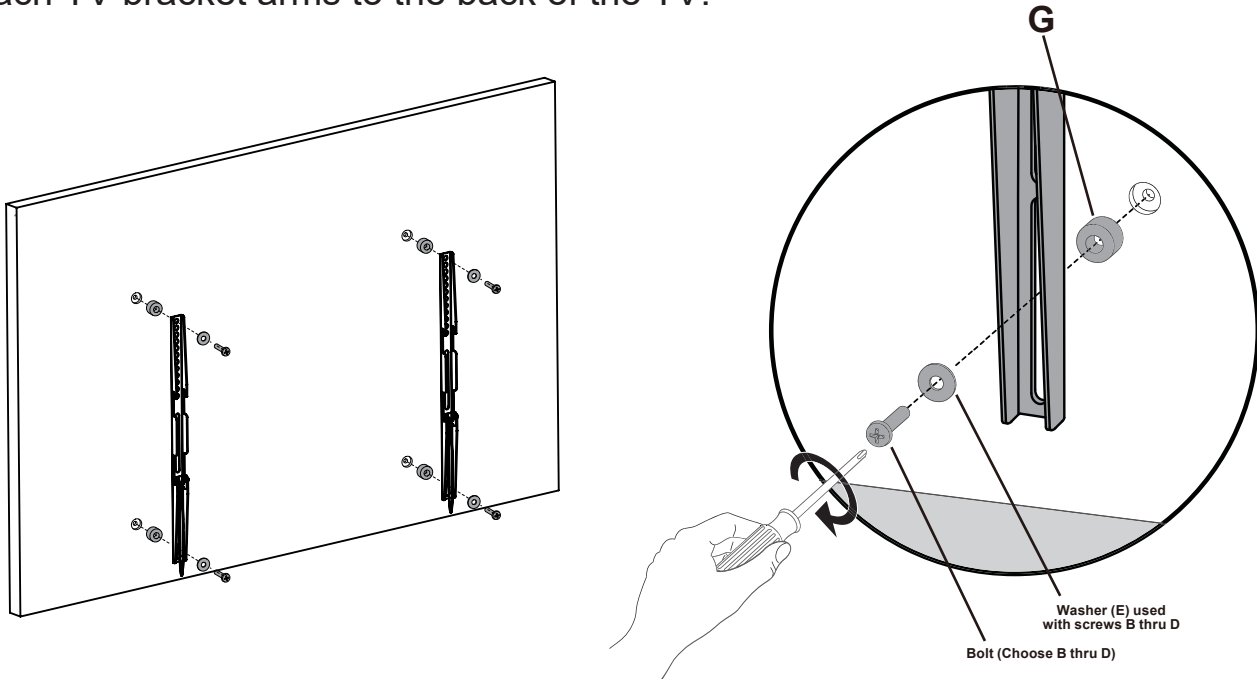

Step 3: Attach TV to Wall Plate

Use two people to lift the TV into position and hook the TV brackets onto the wall plate. The two spring loaded Quick-Lock brackets will snap into wall plate. If you want to release the TV, just pull cord to release both Quick-Locks and pull the bottom of the TV away from the wall. Then lift the TV up and away from the wall plate.

