


Downstage Standard TV Cart

Instructions

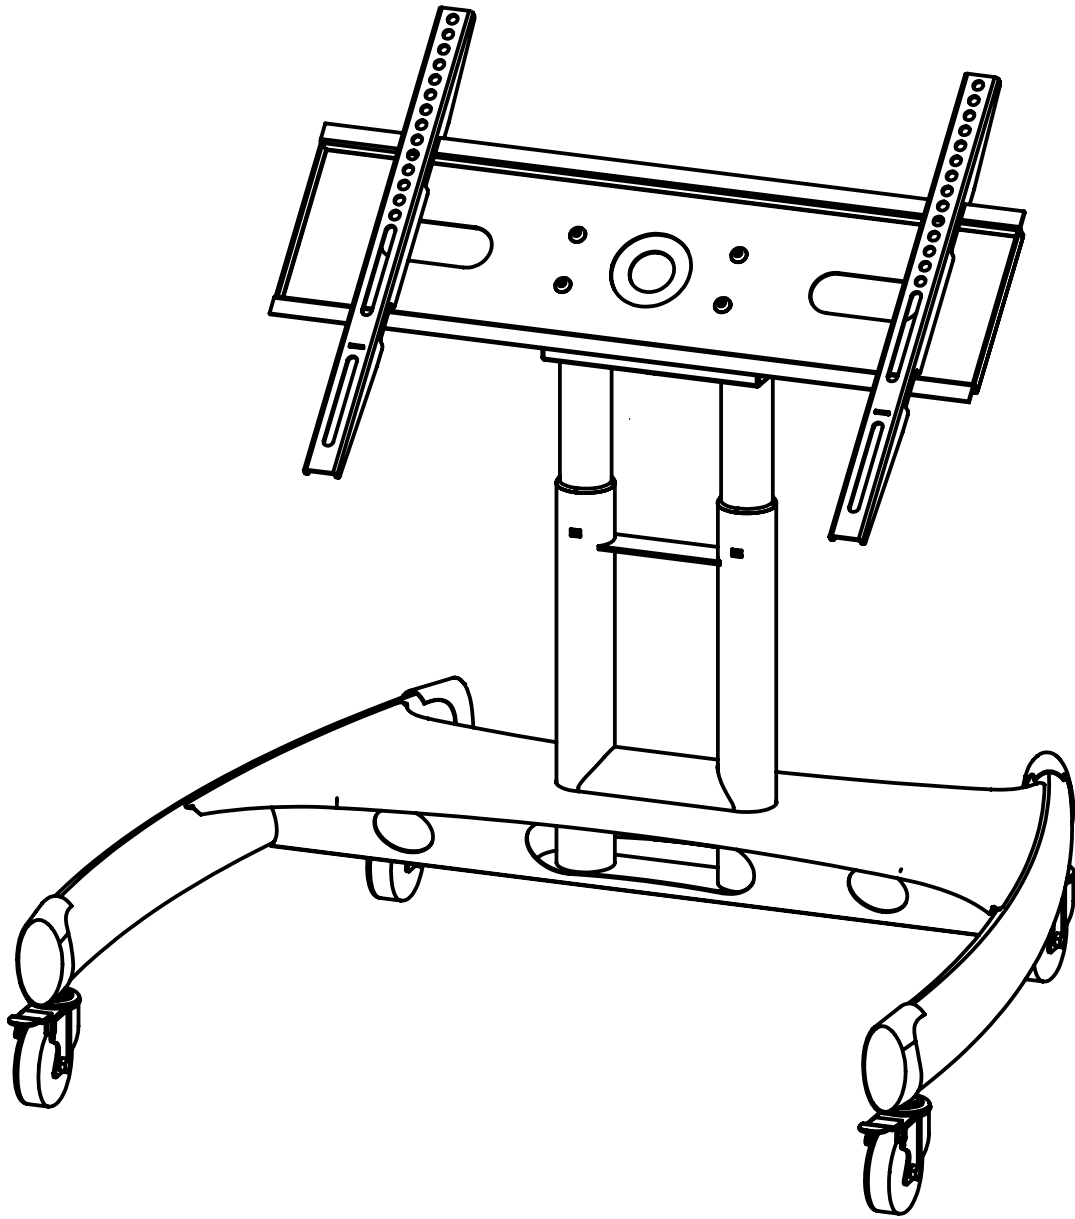

Fits flat panel screens 40"-75" , max. load capacity 100 lbs/45.5kg

Fits all VESA & non-VESA mounting patterns up to 600x400mm

Adjustable in height from 26"-31.5"

Integrated cable management and 2 " locking casters included

Table of Contents


Table of Contents and Warning	2/8
Parts List	3/8
Assembly and Installation	
1.1 Caster wheels to base installation	4/8
1.2 Install telescopic mounting poles	4/8
2. Adjust telescopic mounting poles	5/8
3. Installation of Tilting parts and interface plate	6/8
4. Selection of TV mounting patterns	7/8
5. Mounting TV on poles interface and Cable management	8/8











WARNING!

Severe personal injury and property damage can result from improper installation or assembly. Read the following warning carefully before beginning.


- If you do not understand the instructions or have any concerns or questions, please contact a qualified local installer.
- Do not install or assemble if the product or hardware is damaged or missing, if you require replacement parts, please contact your local distributor for assistance.
- This product fits most 40"-75" :LED/LCD/plasma screen; maximum weight of LCD/plasma screen: 100lbs/45.5kg;
- Do not use this product for anything other than the original design.
- This product contains moving parts, please use with caution.
- The manufacturer disclaims any liability for the modifications, improper installation, or installation over the specified weight range. The manufacturer will not be liable for any damages arising out of the use of, or inability to use, the product.

MANUAL

						
Tightening Direction	Loosening Direction	Phillips Screwdriver	Tape Measure	Adjustment	By Hand	Hex Wrench

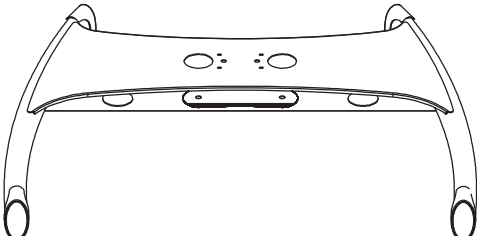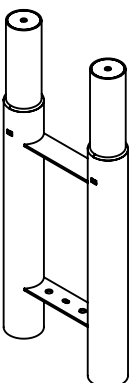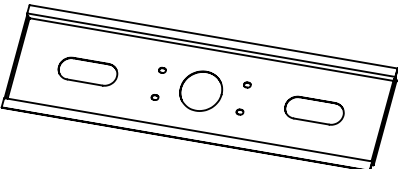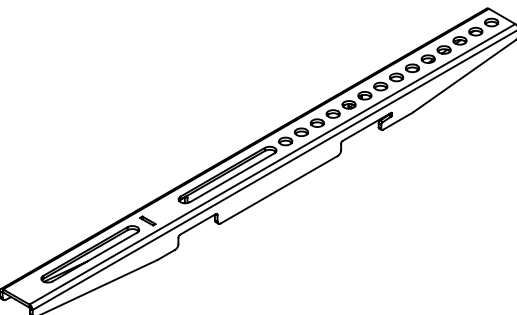
Parts List					
1X 		1X 		1X 	
2X 		1X 		4X 	
				1X 	
A 4X  M8x25 mm	B 4X  M6x25 mm	C 4X  M5x25 mm	D 4X  M6/M5	E 4X  10 mm	
G 2X  M8x10 mm	H 1X  M5	I 12X  M8	J 2X  M6x10 mm	K 2X 	L 16X  M8x20 mm

1.1 Caster wheels to base installation

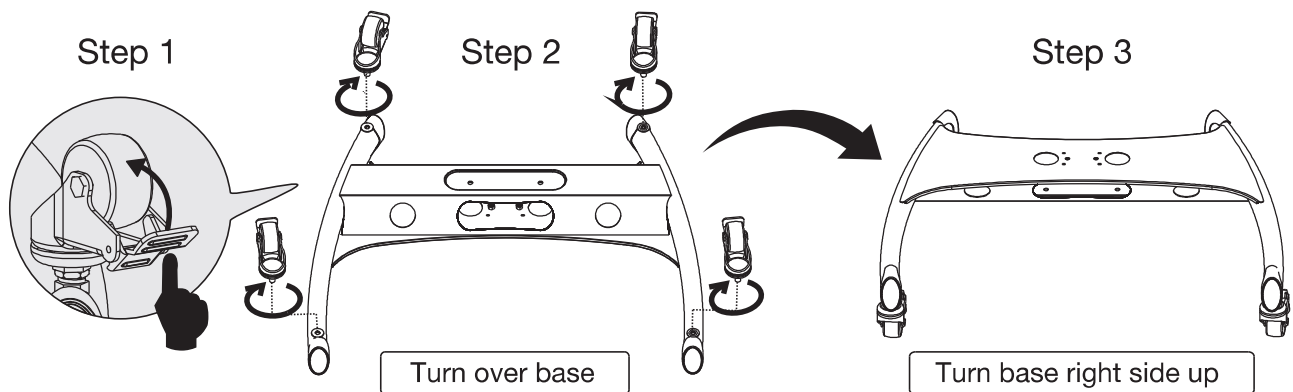

1.2 Install telescopic mounting poles

Note: Make sure cable management holes are facing the rear of base.

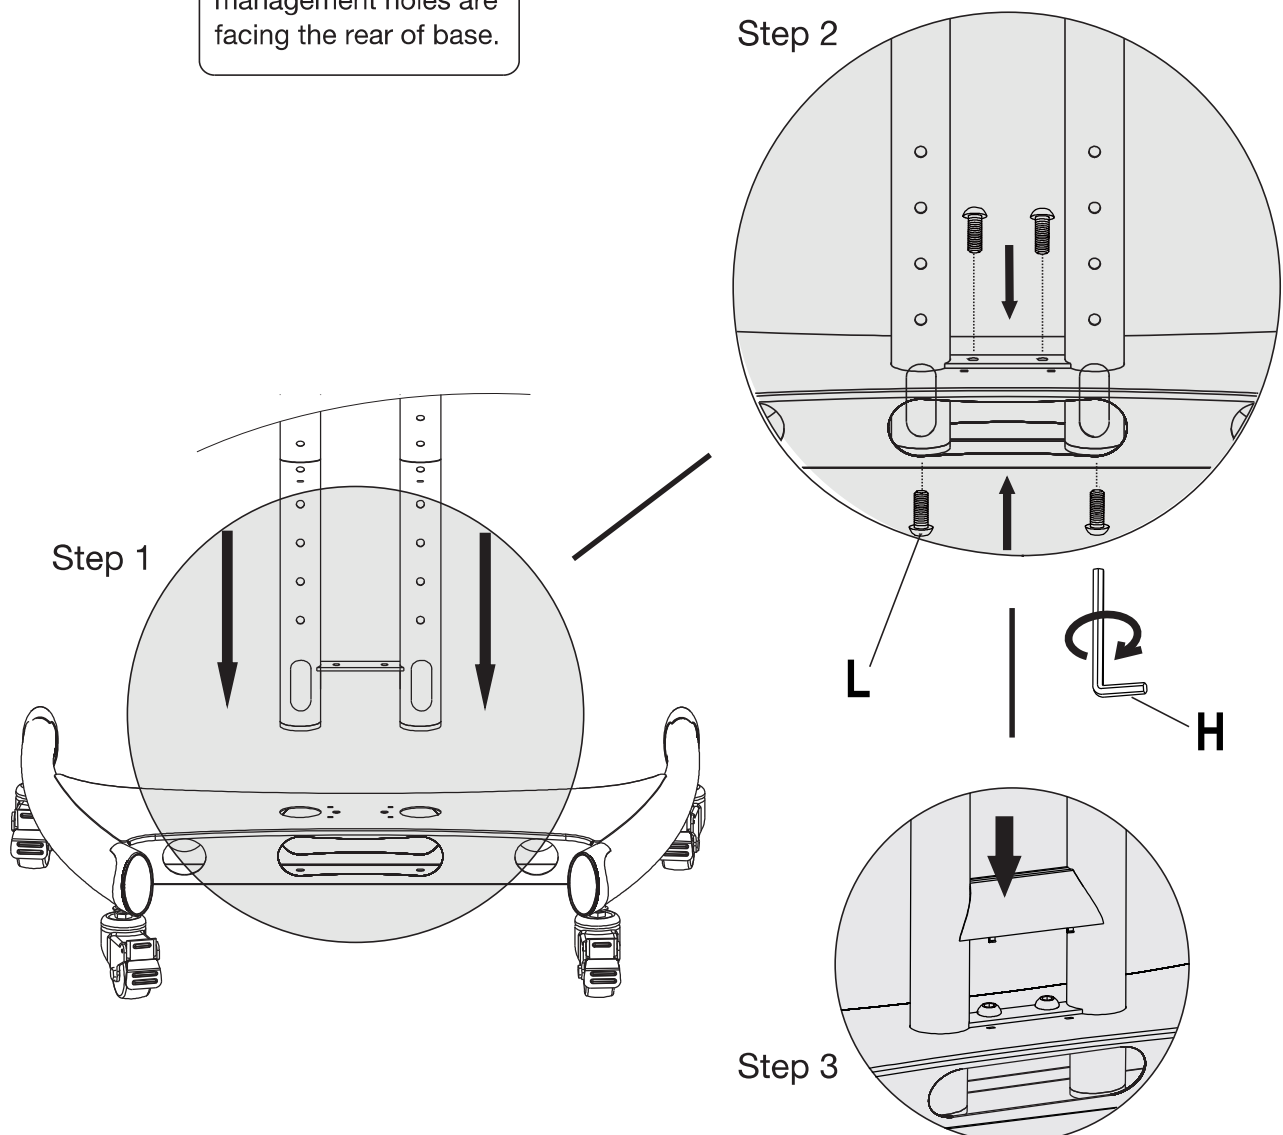

2.Adjust telescopic mounting poles

Step 1: Pull upper pole upward until your desired height, then use screw G to fix the height as shown in Figure 1.

Step 2: Repeat with left pole.

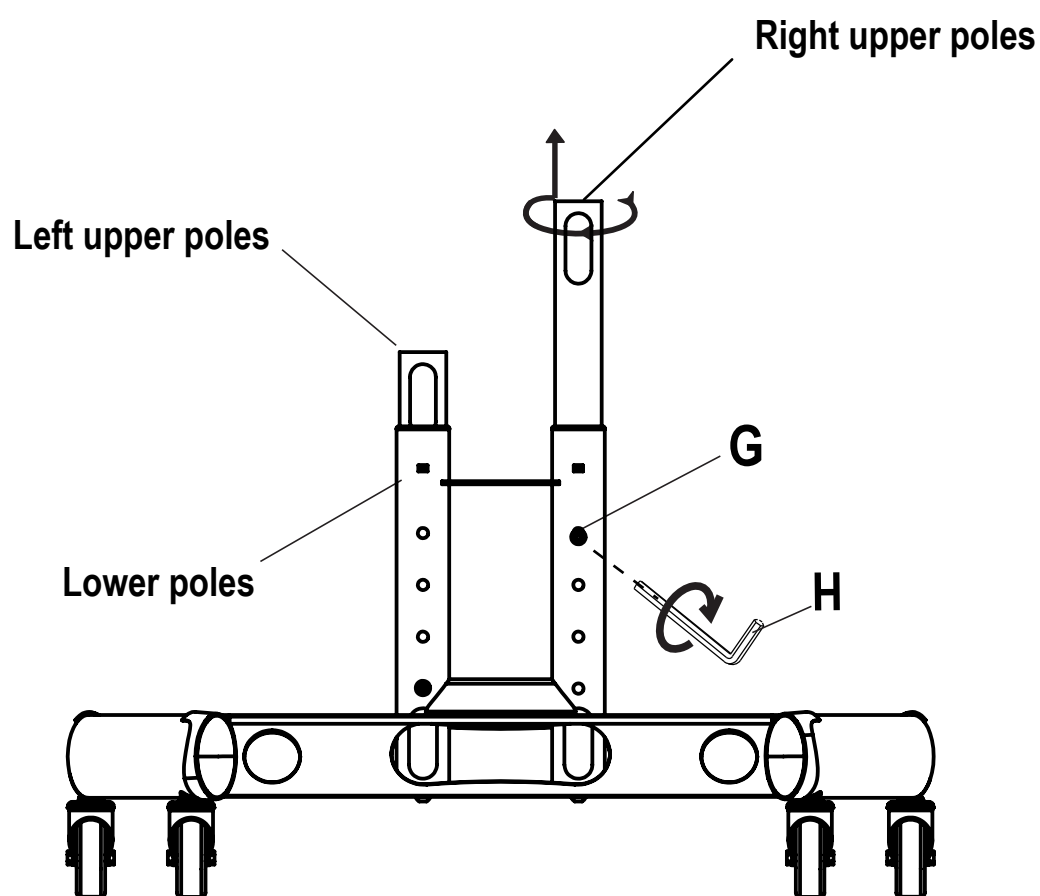


Figure 1

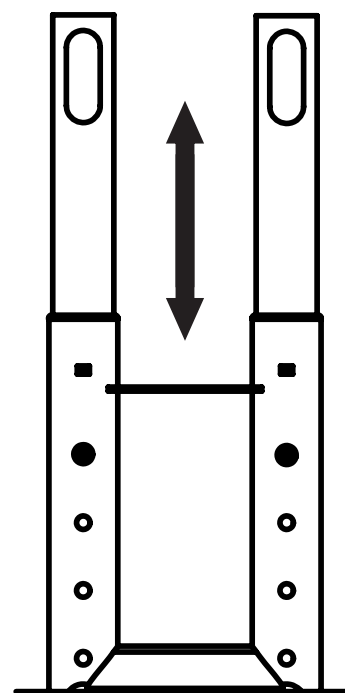


Figure 2

3.Installation of Tilting parts and interface plate

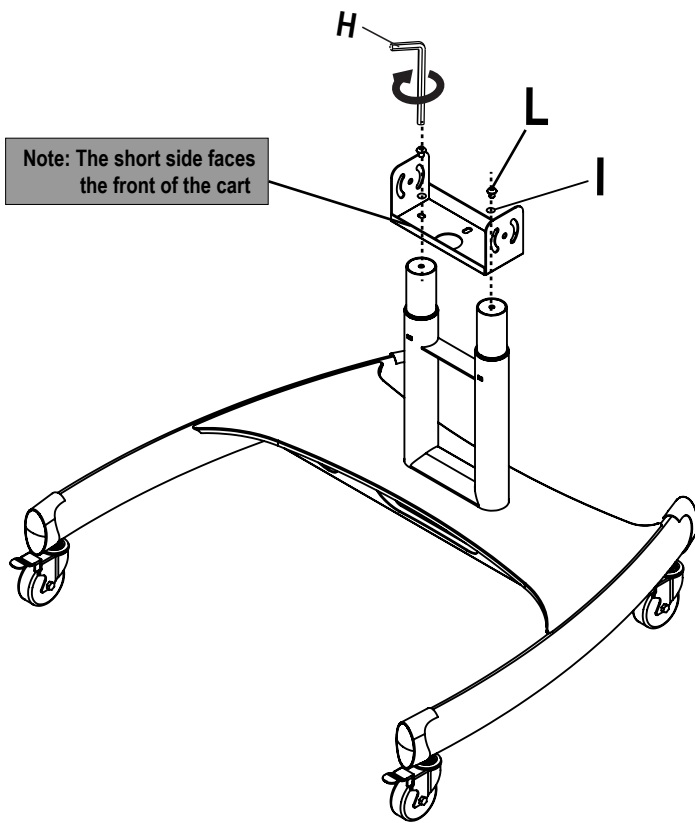


Figure 1

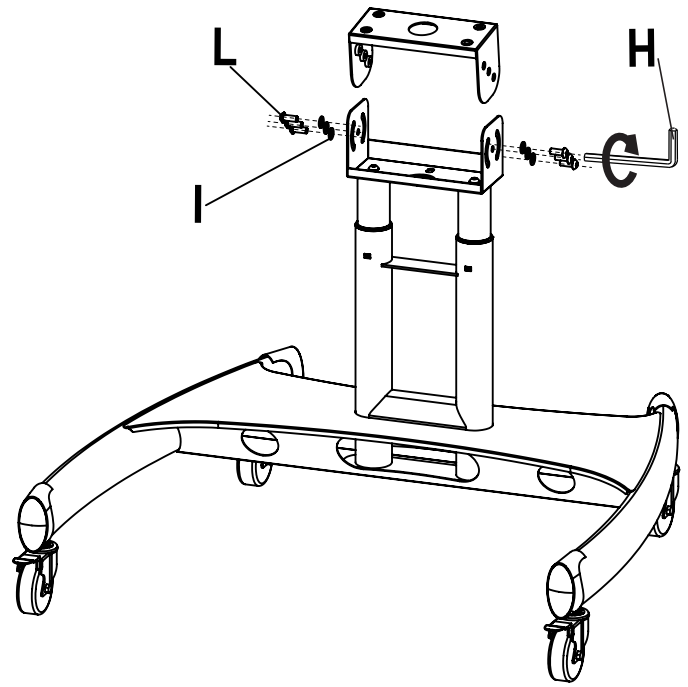


Figure 2






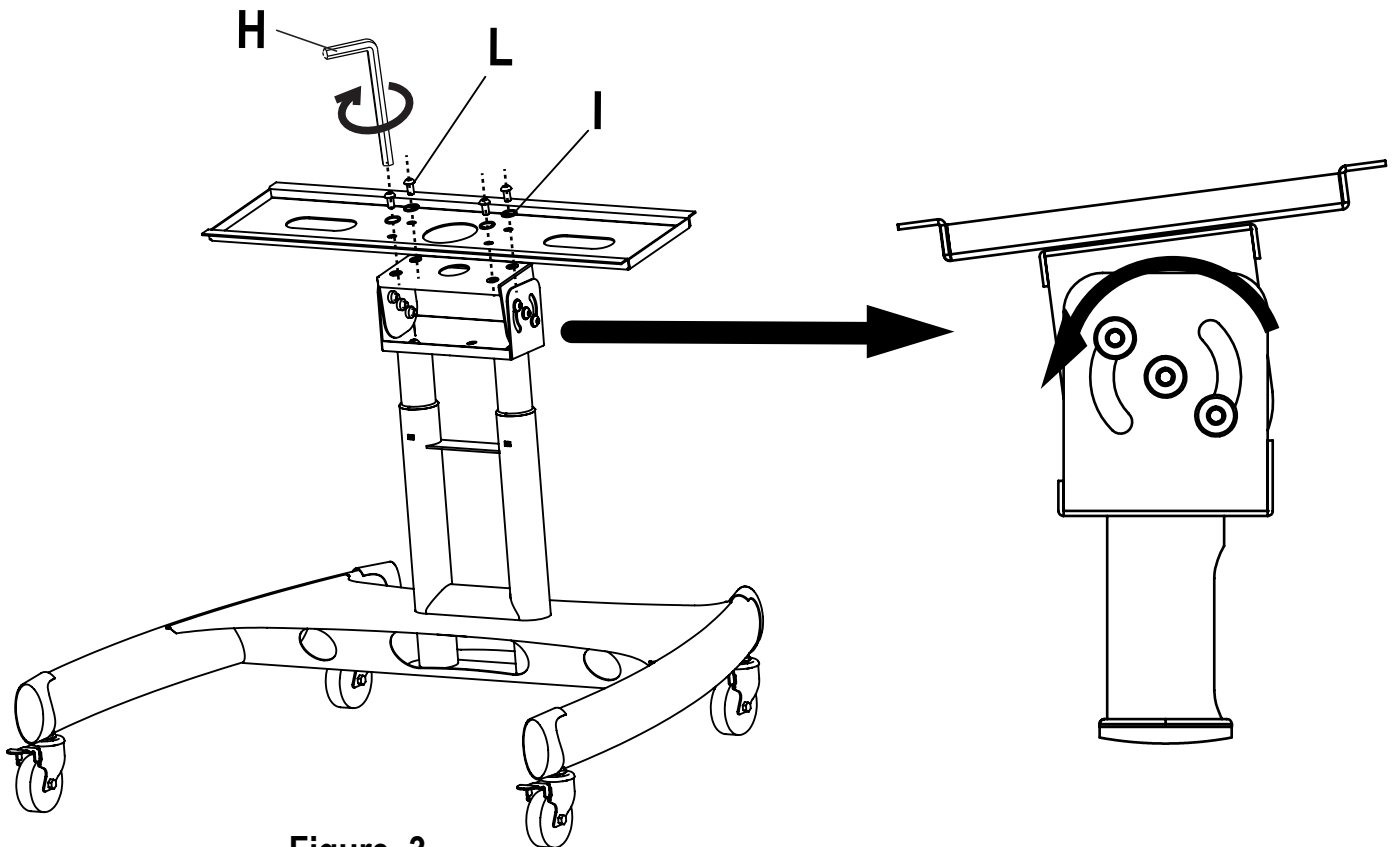


Figure 3



4.Selection of TV mounting patterns

VESA: 100x100~600x400mm

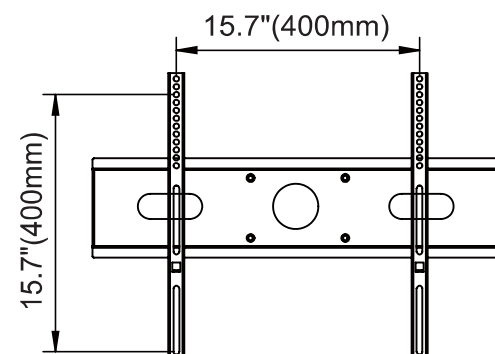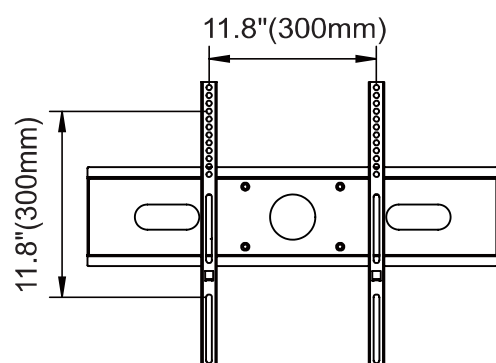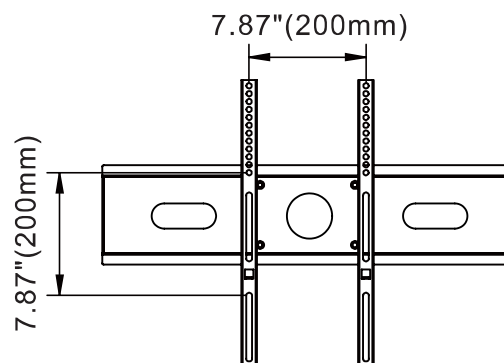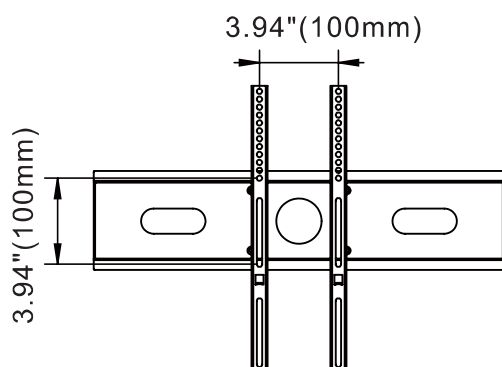


A-C

Only applicable if using M5/M6 screw

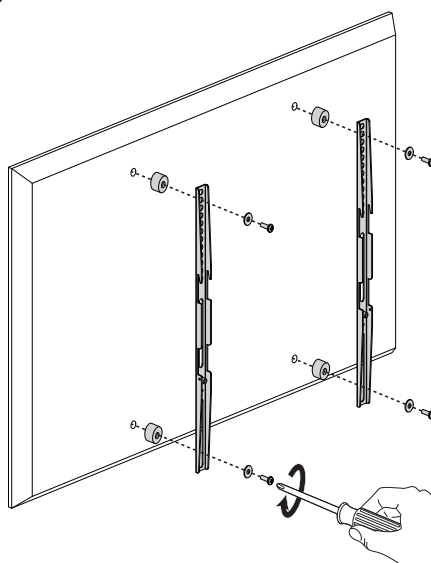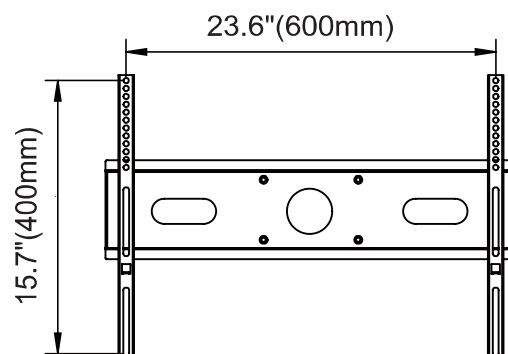


Note:

To avoid damage, a spacer must be used when the mounting hole is minimal.

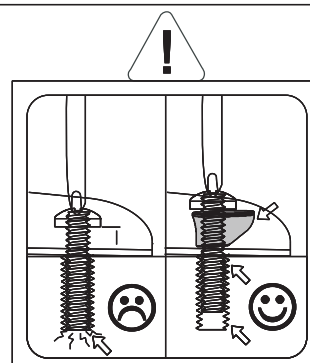

5. Mounting TV on poles interface and Cable management

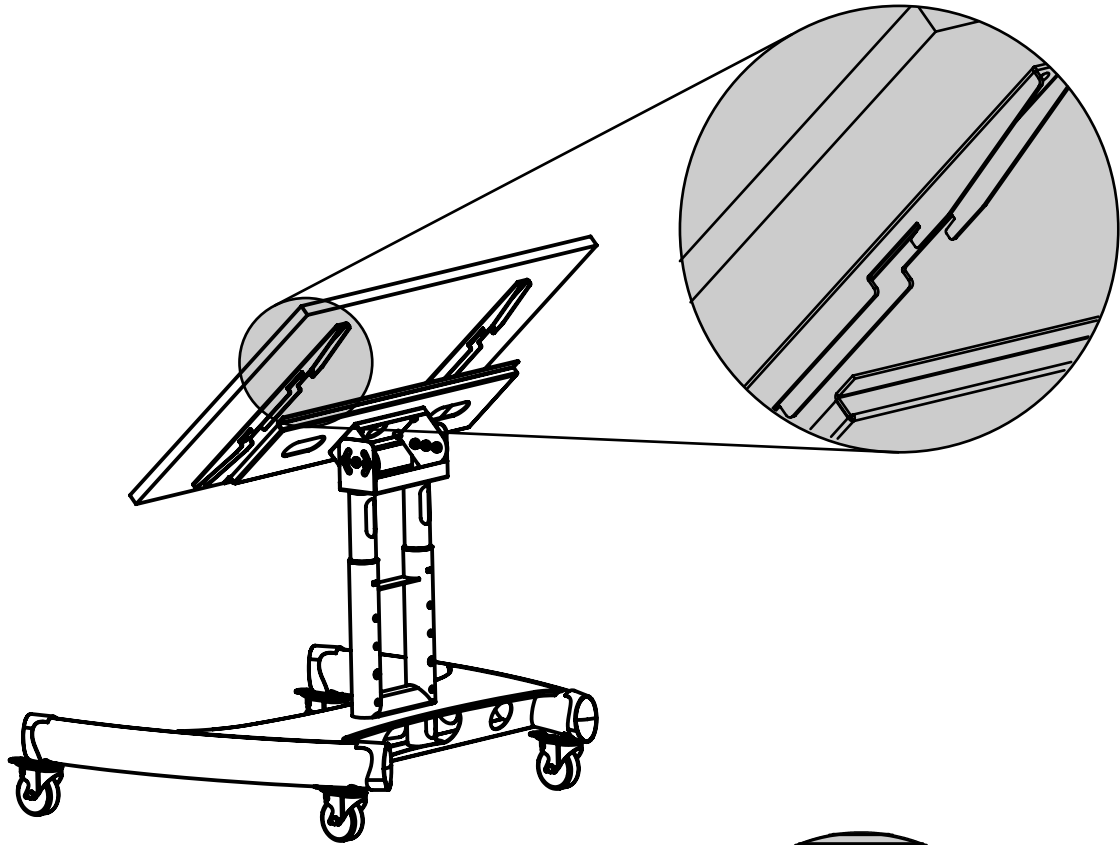

Note:

Take caution when routing wires to avoid damage.

